

HARVIA VIRTÄ

HL900400

Their strong structure and exceptional ease of maintenance make Virtä heaters excellently suitable for those who use the sauna often and like to enjoy the steam for long periods of time. All connections to the Virtä heater are made through the maintenance hatch on the front. There is plenty of room around the connections. The heating elements are separated from the stones, which results in a long heating element life span. If you need to replace a heating element, it is a quick and easy task, as you can just pull out the entire heating element module. Other maintenance measures were also taken into account in the heaters' design from the very start.

Advantages

- A reliable heater with sturdy structure for home sauna and professional use
- The large number of stones guarantees soft and abundant steam. Efficient air circulation heats the sauna very quickly
- Sleek and modern design
- The heating elements are separated from the stones, which results in a long heating element life span
- The maintenance hatch on the front enables quick and easy maintenance without touching the stones



Features

Main material : Steel

H x W x D : 810.0 x 415.0 x 410.0 mm

Net weight (kg) : 24.0


Installation location : Floor

ID	GTIN	Output (kW)	Sauna room size min - max m ³
HL900400	6410082613137	9 kW	8.0-14.0

Related products



HL2



SFE-350400



HL1



HL3S




Spare parts

Product	ID	Pcs
Heating element 3000W/230V	ZCU-830	3


Technical details

Technical data	Type / attribute	HL900400
	Color	Black
	Power output	9 kW
	Stone sizes	10-15 cm
	Stone amount (kg)	50
Dimensions	Product width (mm)	415
	Product height (mm)	810
	Product depth (mm)	410
	Net weight (kg)	24
	Gross weight	26.2
	Package width	505
	Package height	870
	Package depth	440
Safety and installation dimensions	Safety distance front (non-combustible materials)	30
	Safety distance front (combustible materials)	30
	Safety distance right side (combustible materials)	30
	Safety distance right side non-combustible materials	30
	Safety distance left side (combustible materials)	30
	Safety distance left side non-combustible materials	30
	Safety distance side (non-combustible materials)	30
	Safety distance side (combustible materials)	30
	Safety distance behind (non-combustible materials)	30
	Safety distance behind (combustible materials)	30
	Safety distance (Ceiling) (depends on connections and therefore from output, star/delta)	1100
	Room min. height(depends on connections and therefore from output, star/delta)	1900
	Installation opening height	1900
	Installation opening width	4756
	Installation opening depth	400

Technical images

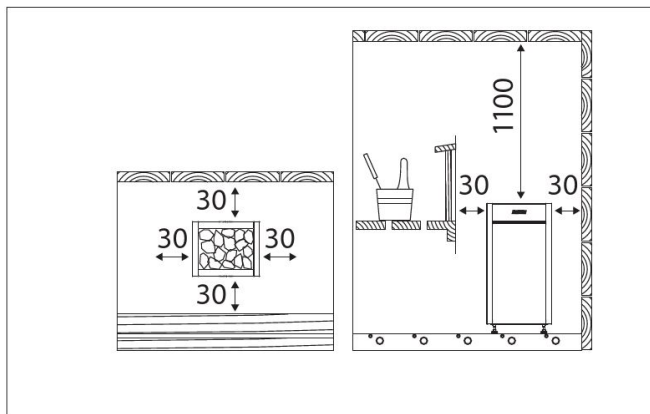


Minimum safety distances (all dimensions in millimeters)

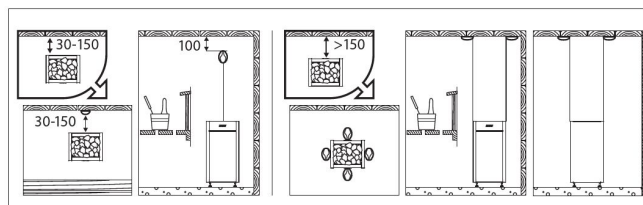


Installing the sensor (all dimensions in millimeters)


HL70 ZCU-823 (2260 W/230 V) x 3
HL90 ZCU-830 (3000 W/230 V) x 3
HL110 ZCU-836 (3600 W/230 V) x 3

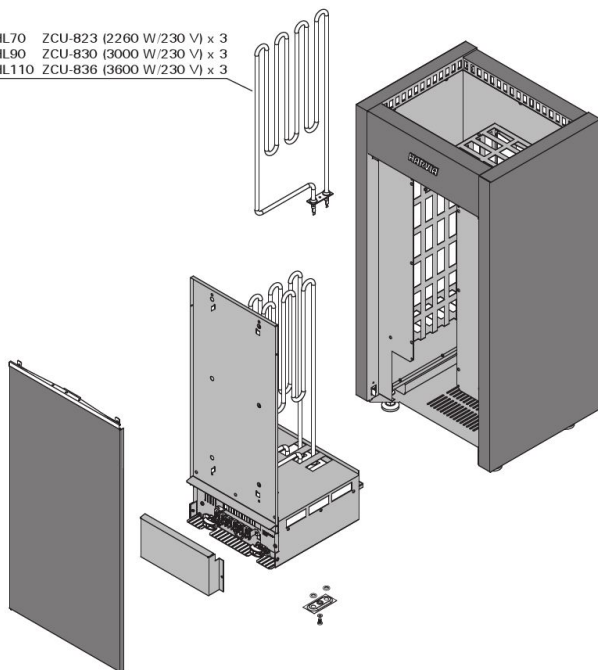

We recommend to use only the manufacturer's spare parts.

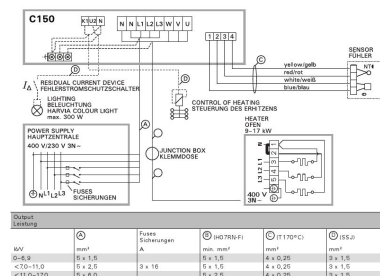

Electrical connections of control unit C150 and HL heater

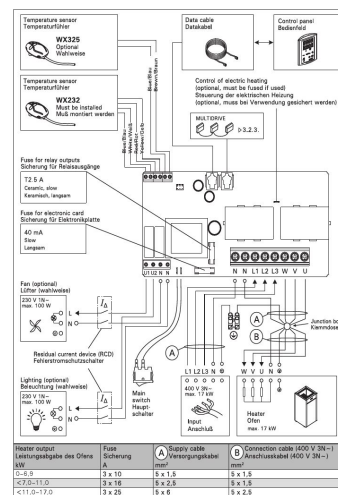

Electrical connections of control unit C175 and HL heater

